


PRIME | ONE STERILIZATION PAPER - SSHAA

CONFIGURATION OVERVIEW

Type: Non-Sterile
 Latex free
 Crepe paper
 Glued
 Nickel-free and phthalate-free
 PVC -free

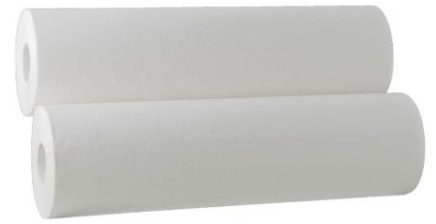

Certifications: Produced according to ISO 9001:2015, EU 1907/2006 REACH, EN 868-2:2017, ISO 11607-1:2020

TECHNICAL SPECIFICATIONS

Parameter	Standard or method	Specification	Typical value
Basis Weight	DIN EN ISO 536	60±2 g/m ²	58.6 g/m ²
Moisture Content	DIN EN ISO 287	5.5 ± 0.5%	5.7 %
Thickness	DIN EN 20 534, ISO 534	0.17 ± 0.02 mm	0.19 mm
Tensile Strength MD	DIN EN ISO 1924-2	≥ 20 N/15 mm	28 N/15 mm
Tensile strength CD	DIN EN ISO 1924-2	≥ 10 N/15 mm	22 N/15 mm
Tensile Strength MD wet	DIN ISO 3781	≥ 5 N /15 mm	12 N/15 mm
Tensile Strength CD wet	DIN ISO 3781	≥ 4N/15 mm	8 N/15 mm
Stretch MD	DIN EN ISO 1924-2	≥ 10 %	10.5%
Stretch CD	DIN EN ISO 1924-2	≥ 2 %	4.2 %
Stretch MD, wet	DIN EN ISO 1924-2	≥ 6.5%	11,4%
Stretch CD, wet	DIN EN ISO 1924-2	≥ 4 %	7.2%
Water Repellency	EN 868-2	≥ 20 sec.	23 sec.
Pore Size	EN 868-2	≤ 35 / ≤ 50	28/33 μm
Sulfate content	ISO 9198	≤ 0.25%	0.038 %
Chloride Content	ISO 9197	≤ 0.05%	0.015 %
PH of aqueous extract	ISO 6588	5.0 -8.0	7.3

Suitable for sterilization with :

- Steam (134°)
- Ethylene Oxide
- Gamma-irradiation (50 kGy)
- Formaldehyde



PRODUCT VARIANTS

Art-No.	SSHAA05-AKZ-EG-CD6	SSHAA05-AKZ-EG-CD7	SSHAA05-AKZ-EG-CD8	SSHAA05-AKZ-EG-CD9
Colour and Measure	Green 0.5x 100 mt	Green 0.75 x 100 mt	Green 1 x 100 mt	Green 0,60 x 100 mt
Packaging	2 Roll/Cart.	1 Roll/Cart.	1 Roll/ Cart	1 Roll/Cart.
Art-No.	SSHAA05-AKZ-WH-CD6	SSHAA05-AKZ-WH-CD7		
Colour and Measure	White 0.5 x 100 mt	White 0.75 x 100 mt		
Packaging	2 Roll / Cart	1 Roll / Cart		

CONTENT: 98.9 % Natural ECF - bleached celluloses, 0.5% Wet strength resin, 0.5 % sizing agent, < 0.1% colour (only in green paper)

STORAGE INFO: Keep away from direct sunlight, heat sources, flames, sparks and humidity. Store in a dry place. Ideal storage temperature 15-25 °C, ideal humidity 35-50%.

Rev. 4 17-10-2025

